







Innovative Process
Texture customization


55° SuperWhite Fabric
Natural Color Rendering

RUN CHROMA STONE

-  Color Symphony
Personalized Customization
-  Precision Polishing
High Hardness & Wear Resistance
-  Natural Texture
Rich layers
-  Super WhiteFabric
Pure Texture


RUN
CHROMA
STONE

Realize color blending in polished tiles! Amidst the shimmering and glossy circulation, lies the temperature of precision polishing, 55 ° ultra white fabric, with large, medium, and small color particles dancing together, Random natural fabric, each piece is different, Faint the three-dimensional layers into touchable textures. In the mirror without water ripples, a space without an R-angle is reflected. Customizable designs leave a unique fashion mark on your space.

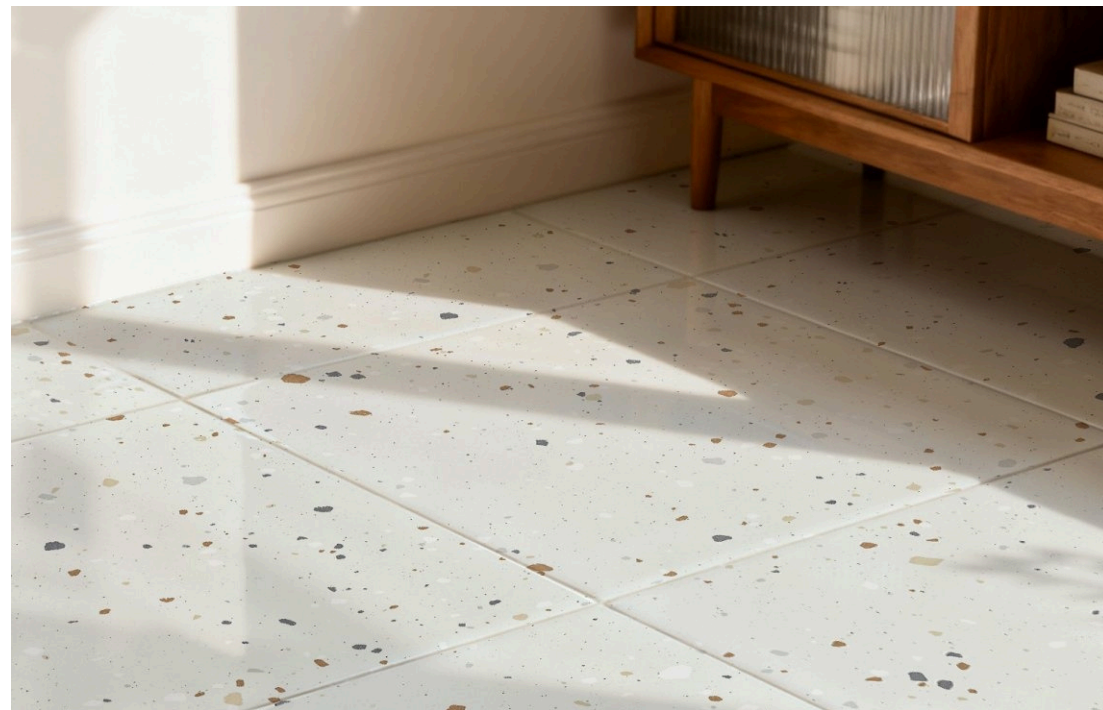


- + **Color Symphony · Personalized Customization**
Featuring rich colors and diverse textures, with scattered large, medium, and small color blocks, creating a three-dimensional visual rhythm. Paired with five basic color tones, it also supports personalized customization of particle proportions and color blocks, making each brick unique. Design language that easily adapts to various spatial requirements.
- + **Natural texture · Rich layers**
55 ° ultra white fabric, making the surface texture and color more vivid and transparent. While enhancing the brightness of the space, it also contributes to the overall space. Establishing a premium texture tone and showcasing elegant taste.
- + **Precision Polishing · High Hardness & Wear Resistance**
The interweaving and interweaving of large, medium, and small color particles are as spontaneous as natural growth, with no deliberate distribution of gaps. The layers are rich and varied in depth. Delicate, every inch exudes a genuine and natural sense of comfort.
- + **Super White Fabric · Pure Texture**
XRC's innovative polishing process endows the brick surface with a warm and smooth texture like jade. The brick surface achieves true waterless ripples and flatness. Comparable to a mirror, shining and smooth under the reflection of light; Smooth treatment without R-angle, wear-resistant and durable, more worry free.

S P L A S H T E R R A Z Z O

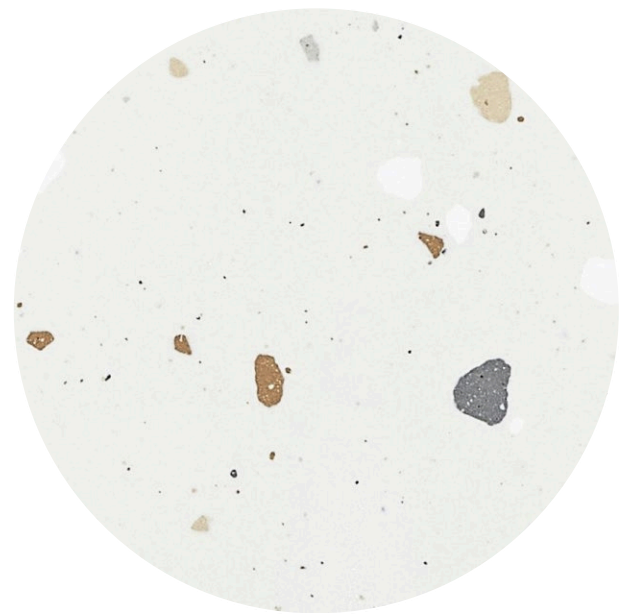




Use The Product:SP 6 6 A A 0 1 T/POLISHED

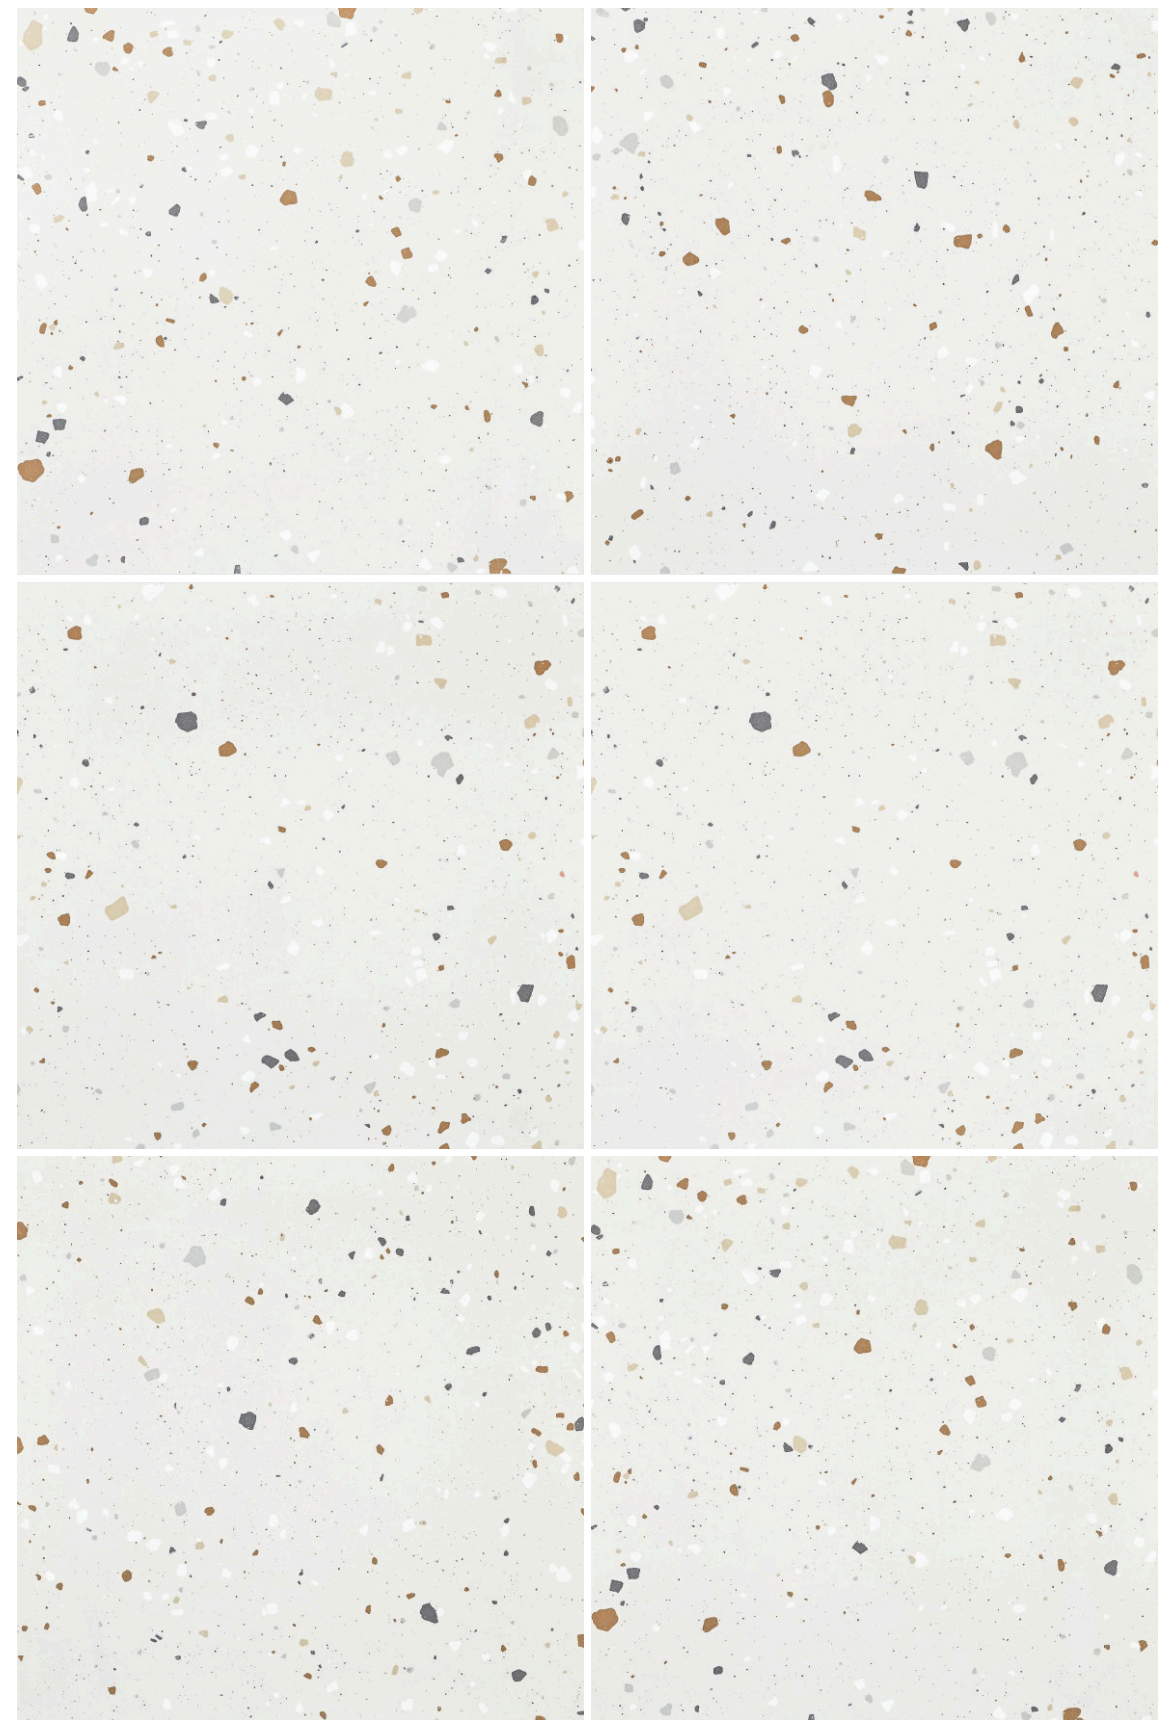

Polished
SP66AA01T
600X600mm 24" X 24"

Random texture

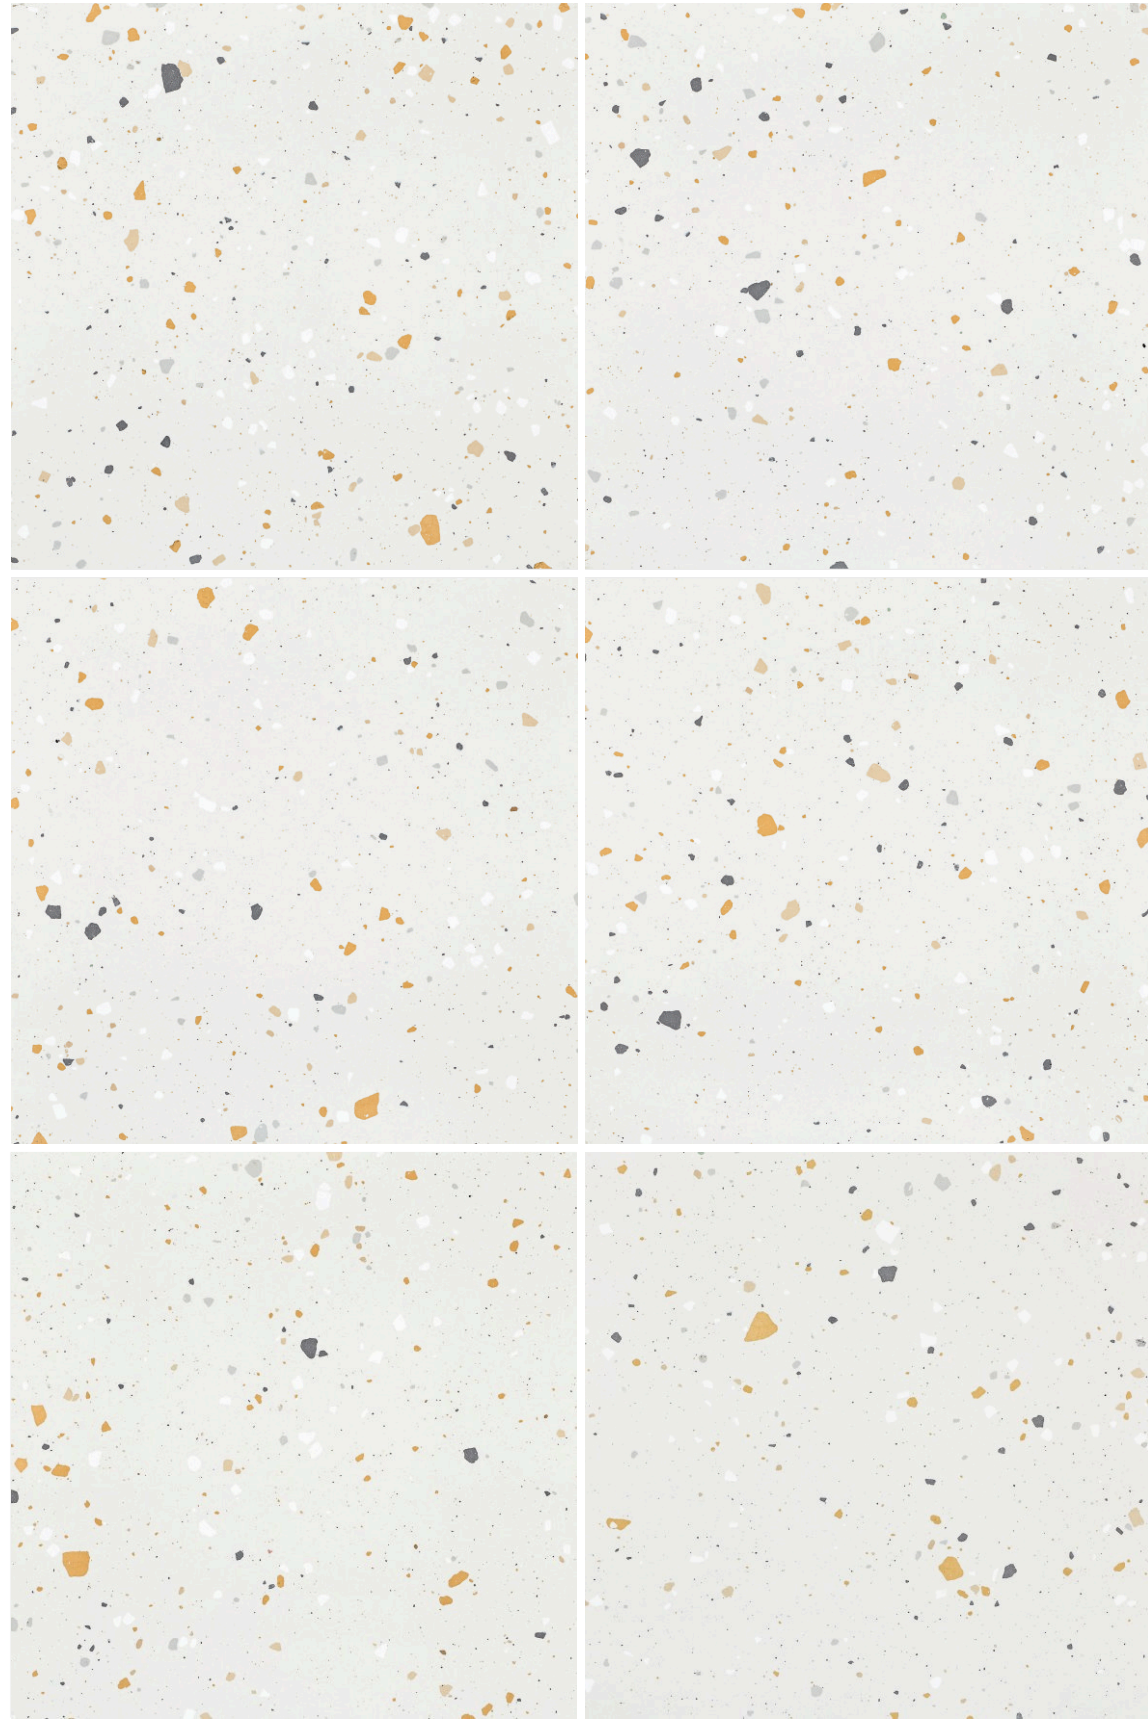Polished
SP66AA02T
600X600mm 24" X 24"

Random texture




Use The Product:SP 6 6 A A 0 2 T/POLISHED
600X600mm 24" X 24"




Use The Product: S P 6 6 A A 0 3 T /POLISHED
600X600mm 24" X 24"



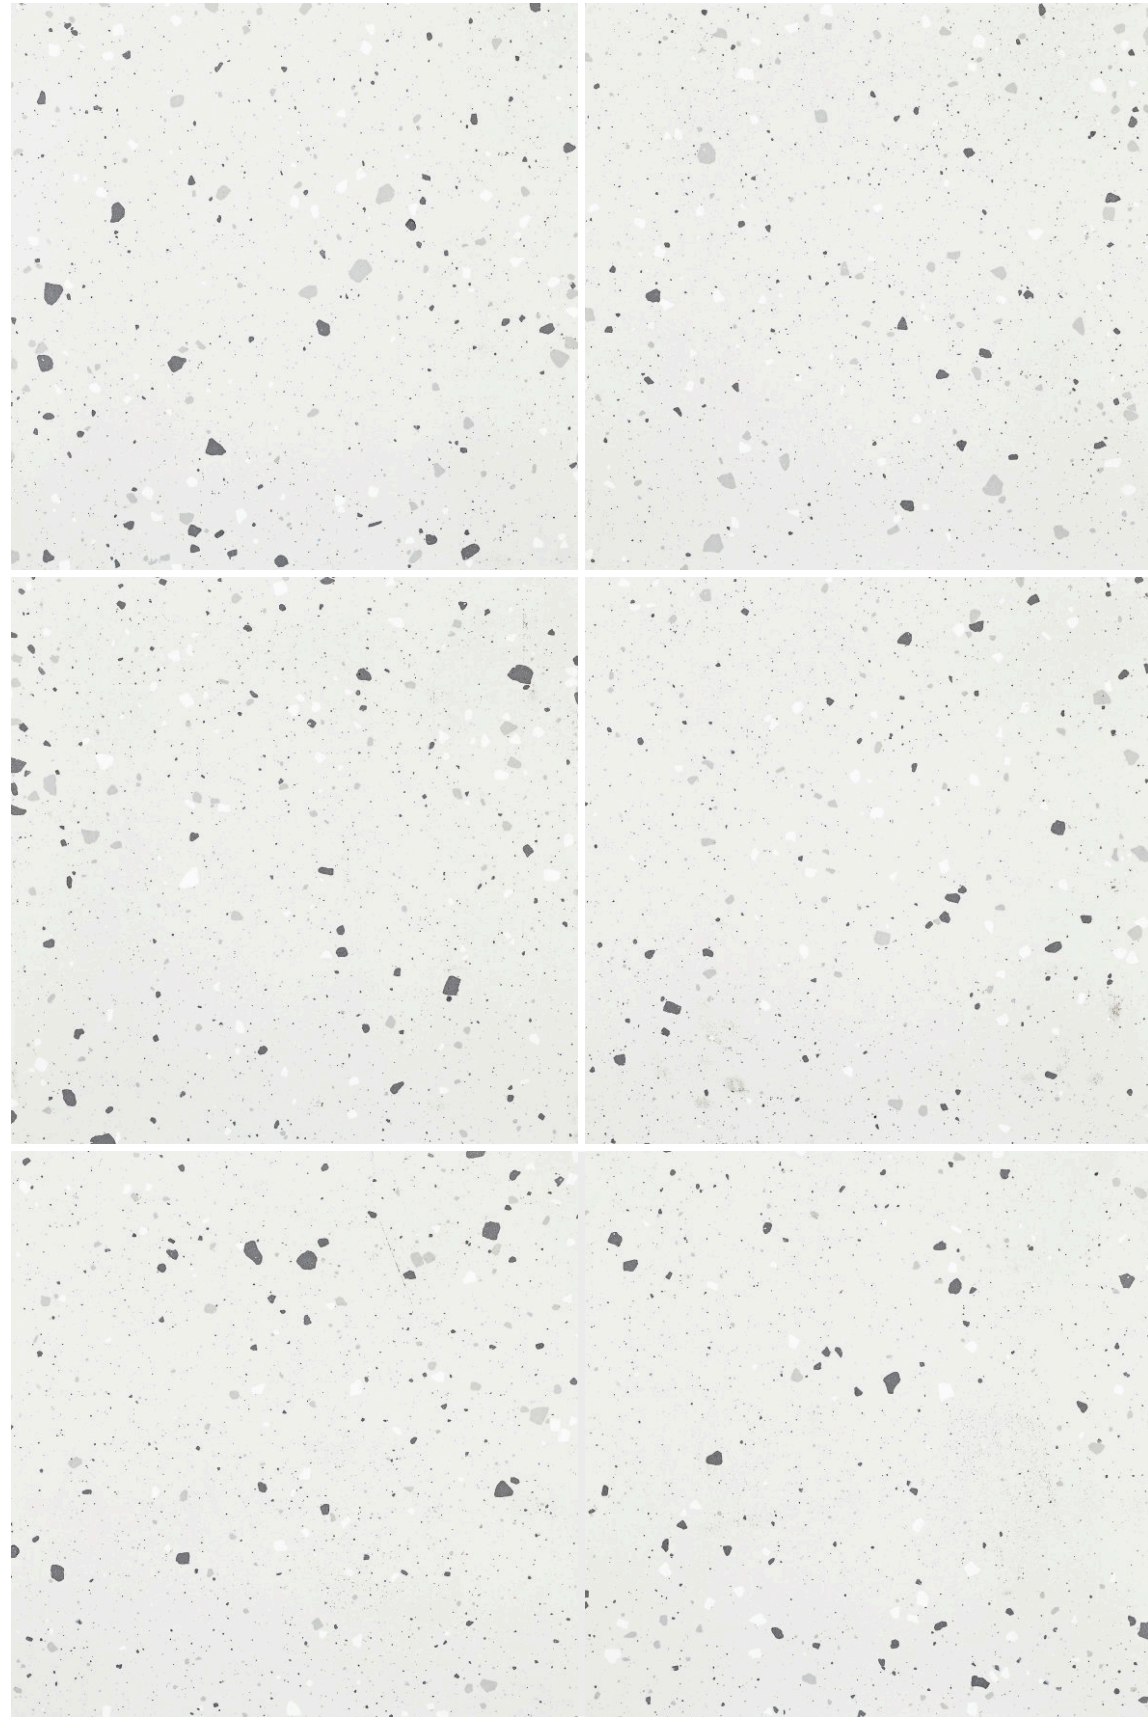

Polished
SP66AA03T
600X600mm 24" X 24"

Random texture

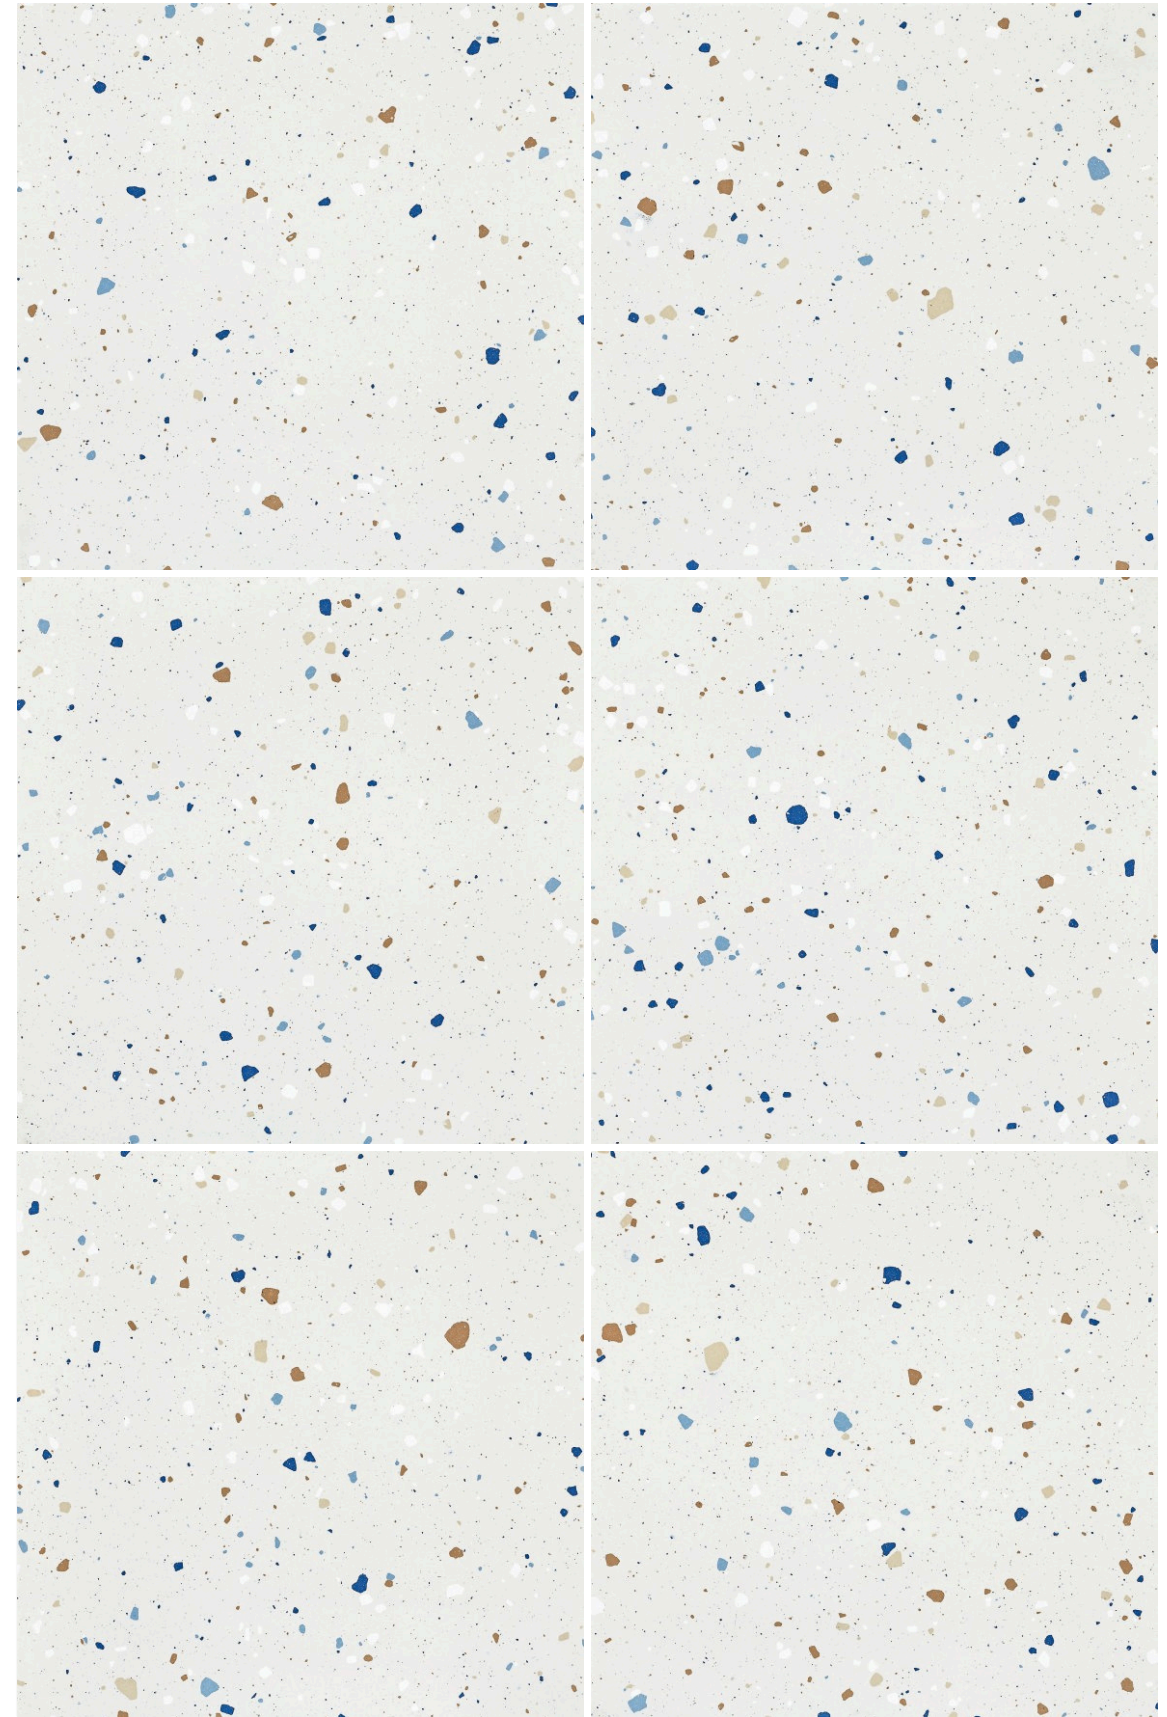



Polished
SP66AA04T
600X600mm 24" X 24"

Random texture


Use The Product: S P 6 6 A A 0 4 T / POLISHED
600X600mm 24" X 24"



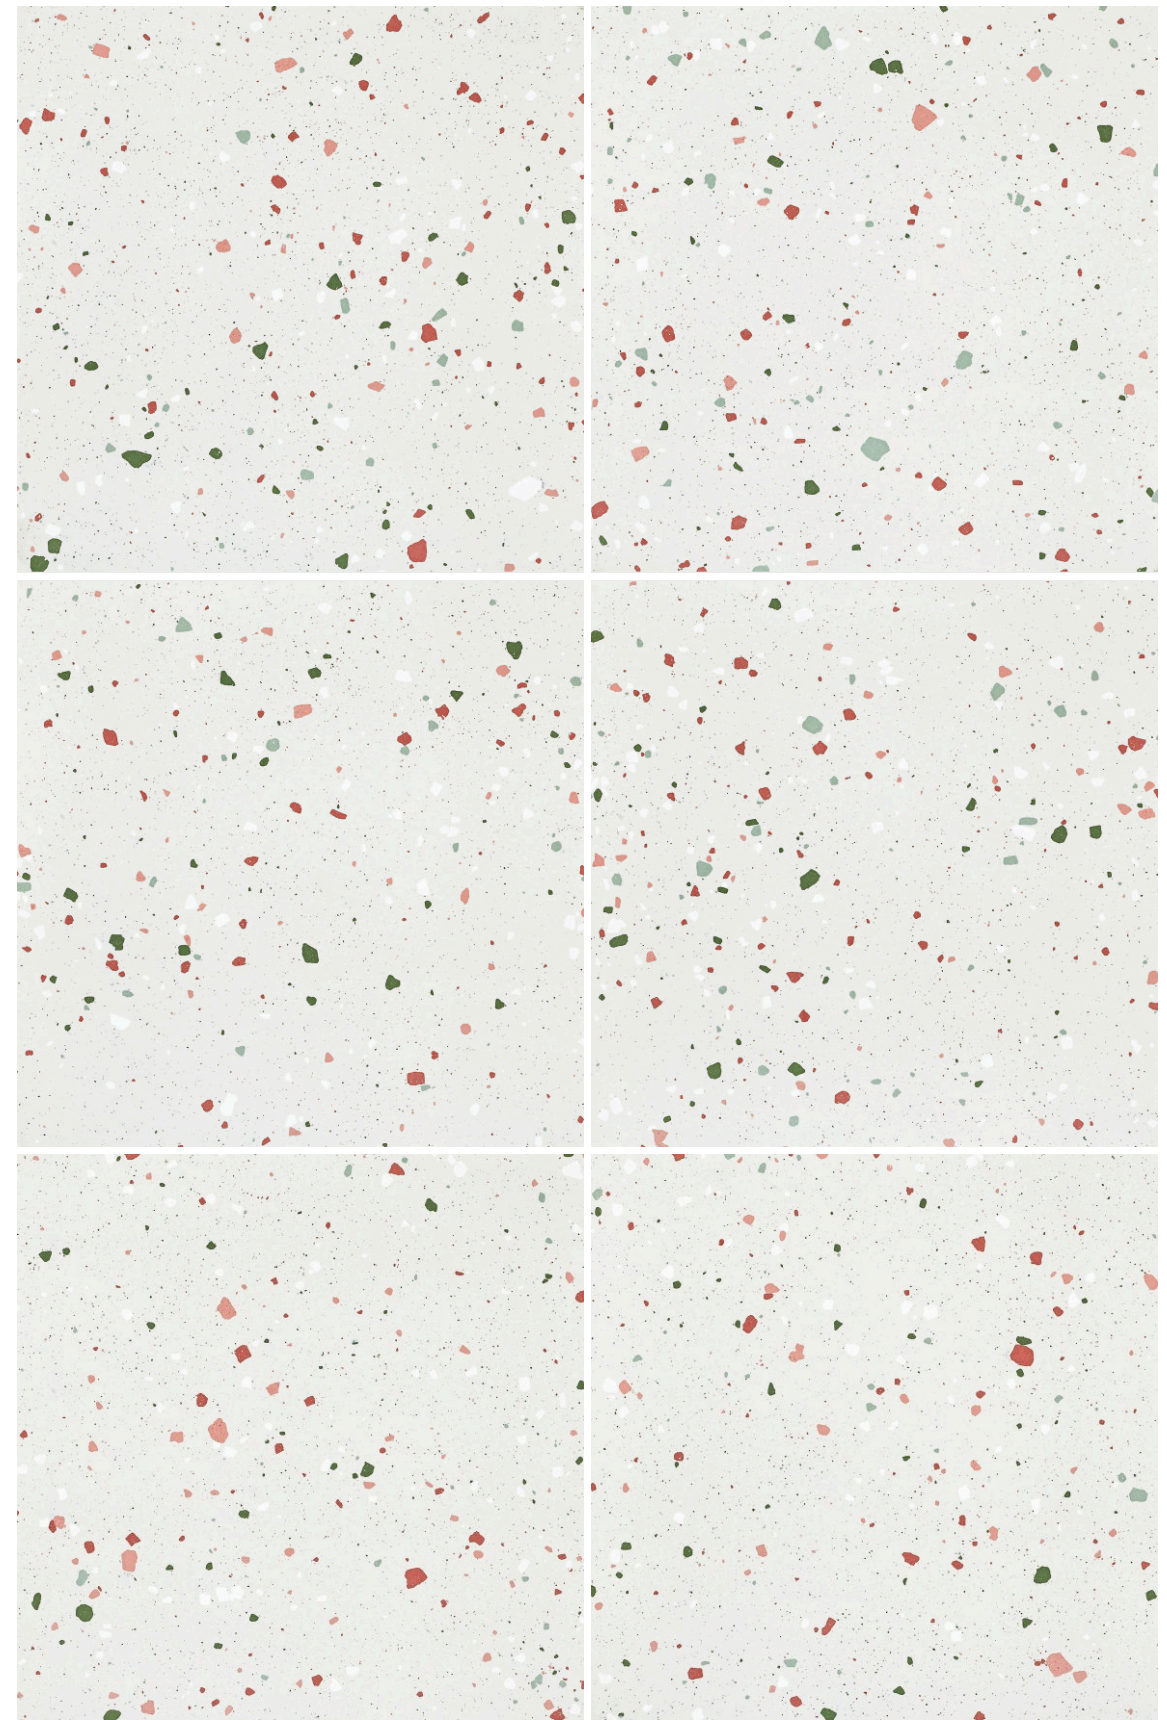


Polished
SP66AA05T
600X600mm 24" X 24"

Random texture


Use The Product:SP 6 6 A A 0 5 T /POLISHED
600X600mm 24" X 24"




Use The Product: S P 6 6 A A 0 6 T / POLISHED
600x600mm 24" X 24"

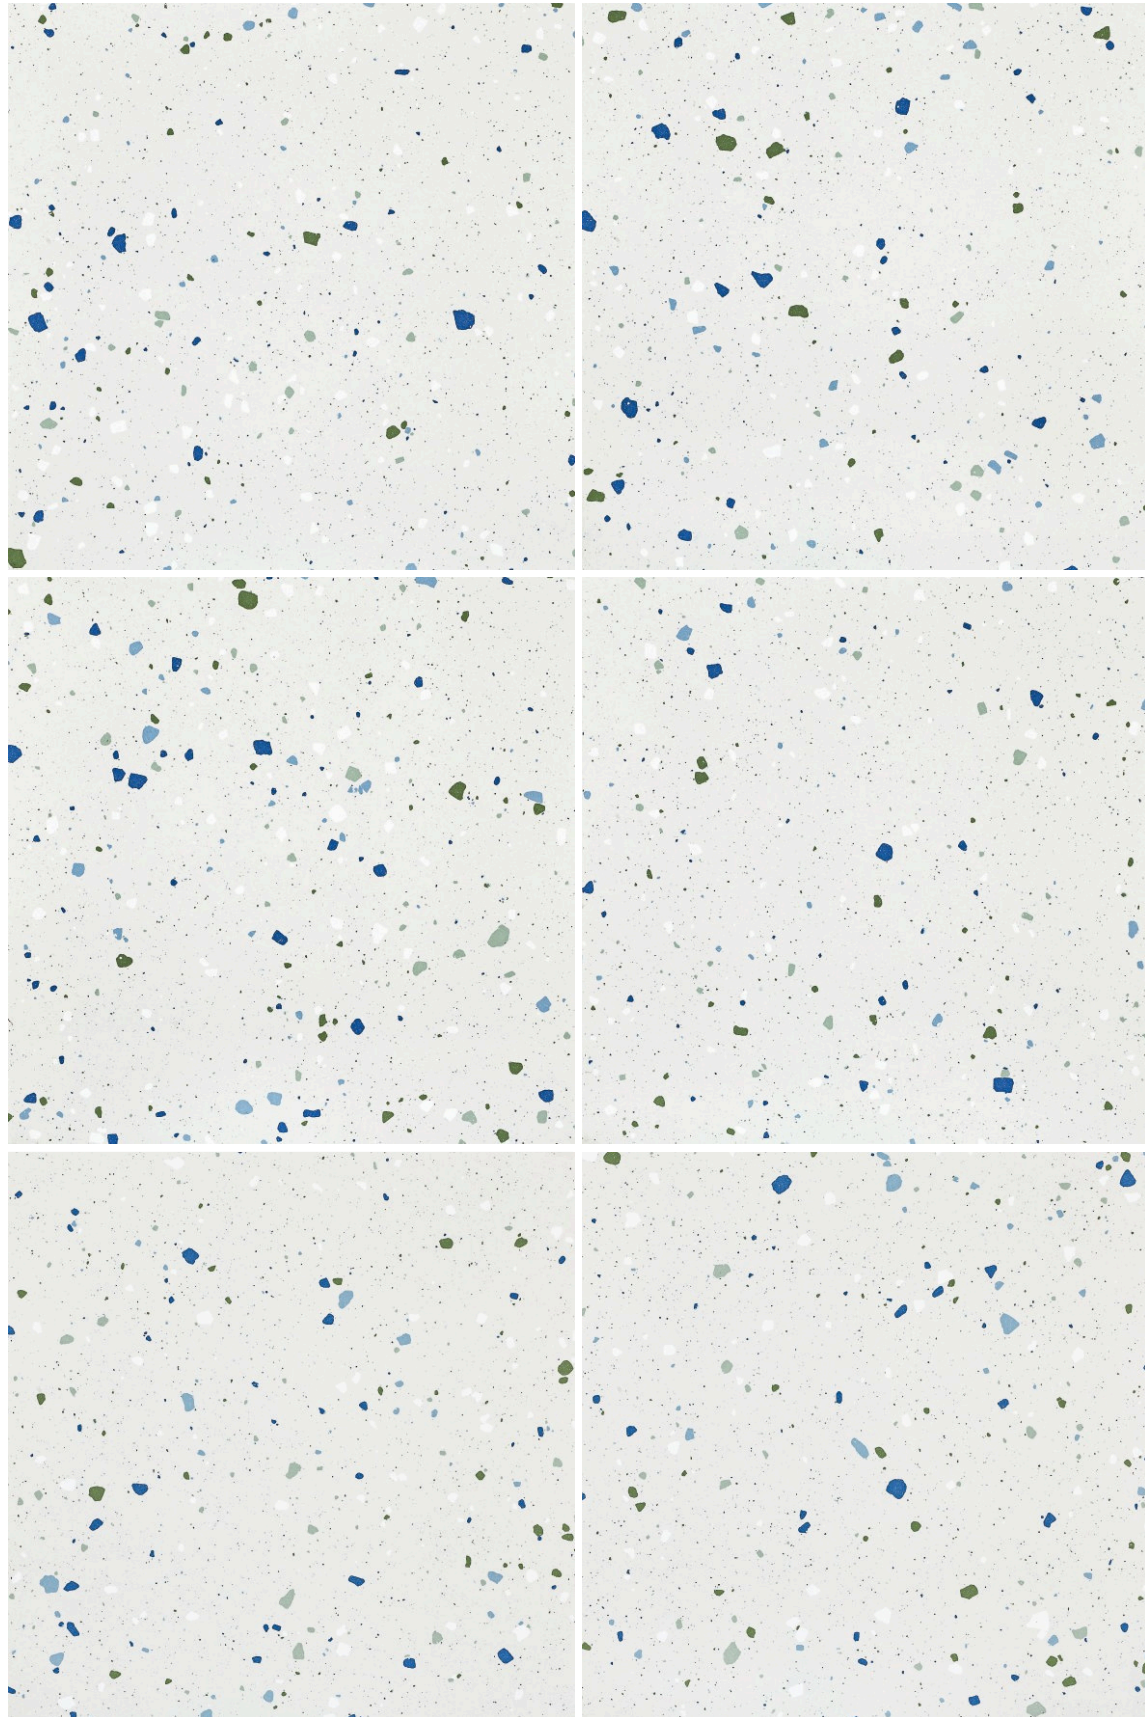

Polished
SP66AA06T
600X600mm 24" X 24"

Random texture

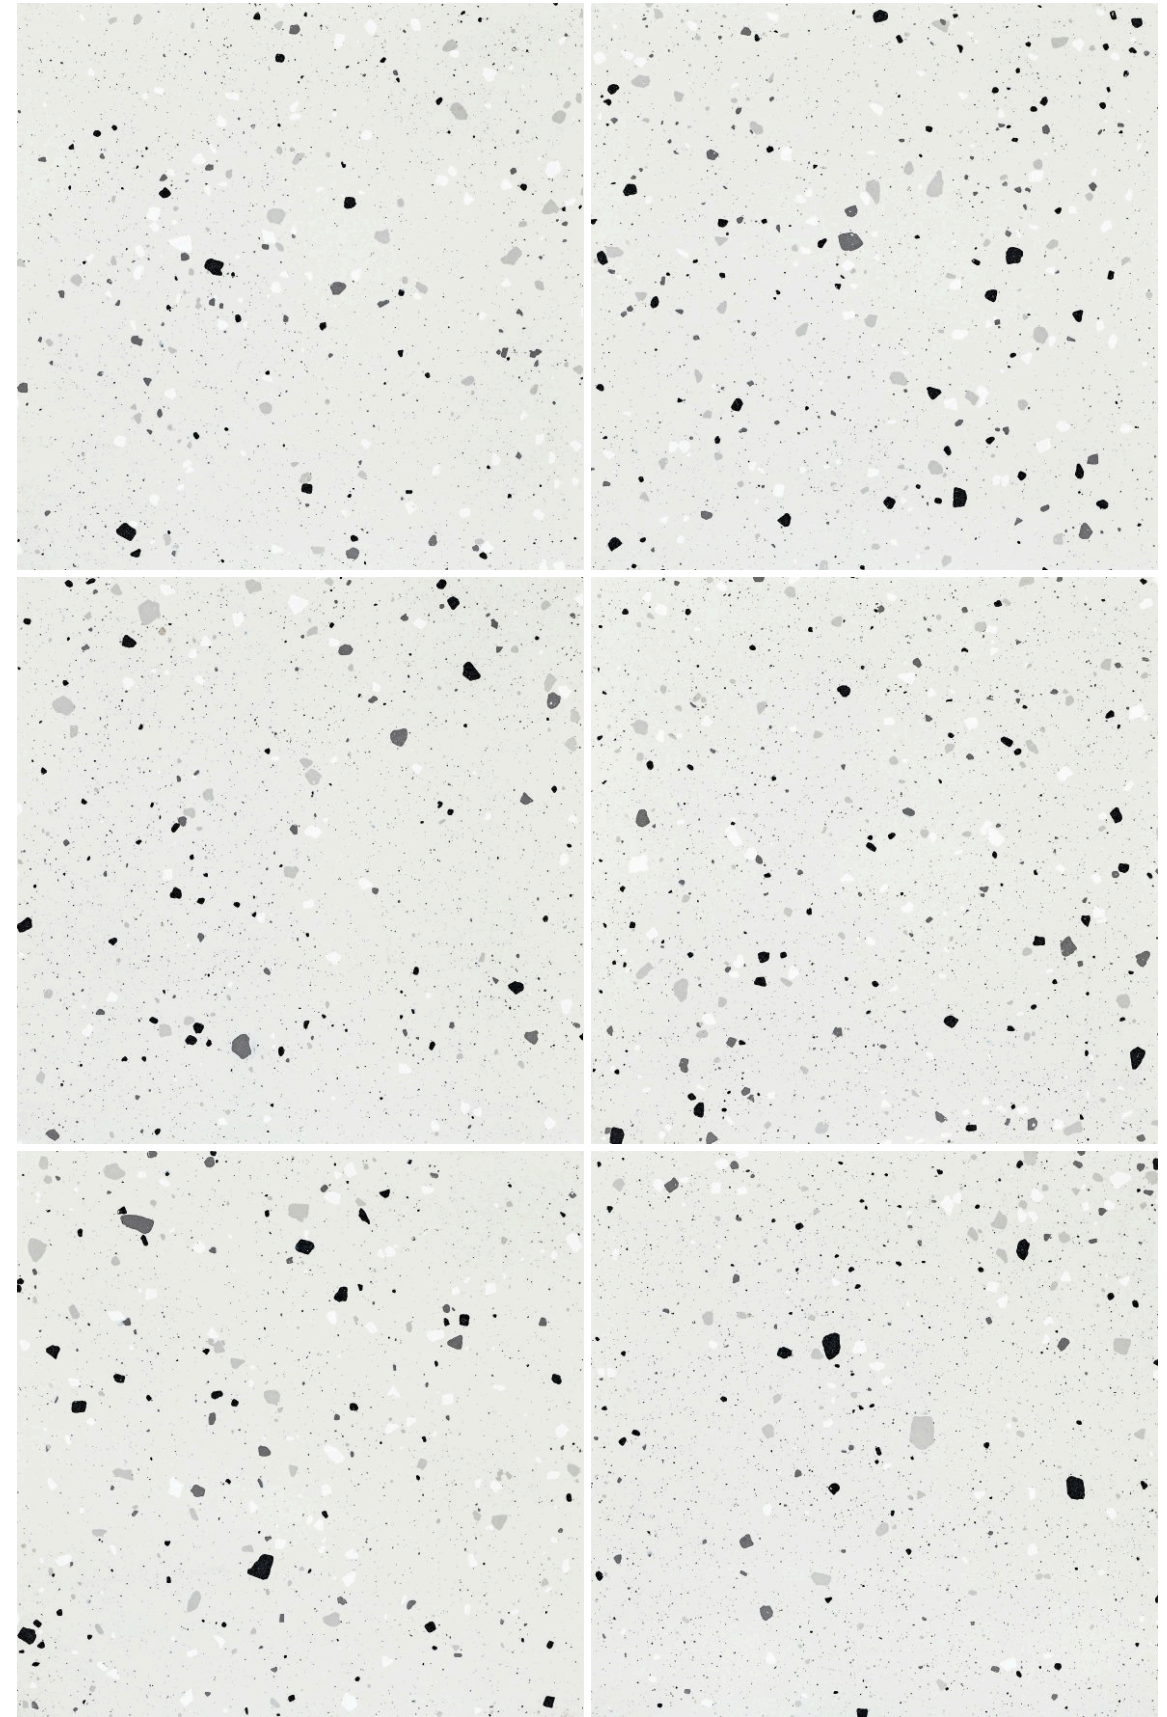



Polished
SP66AA07T
600X600mm 24" X 24"

Random texture


C R Y S T A L G R A N U L E



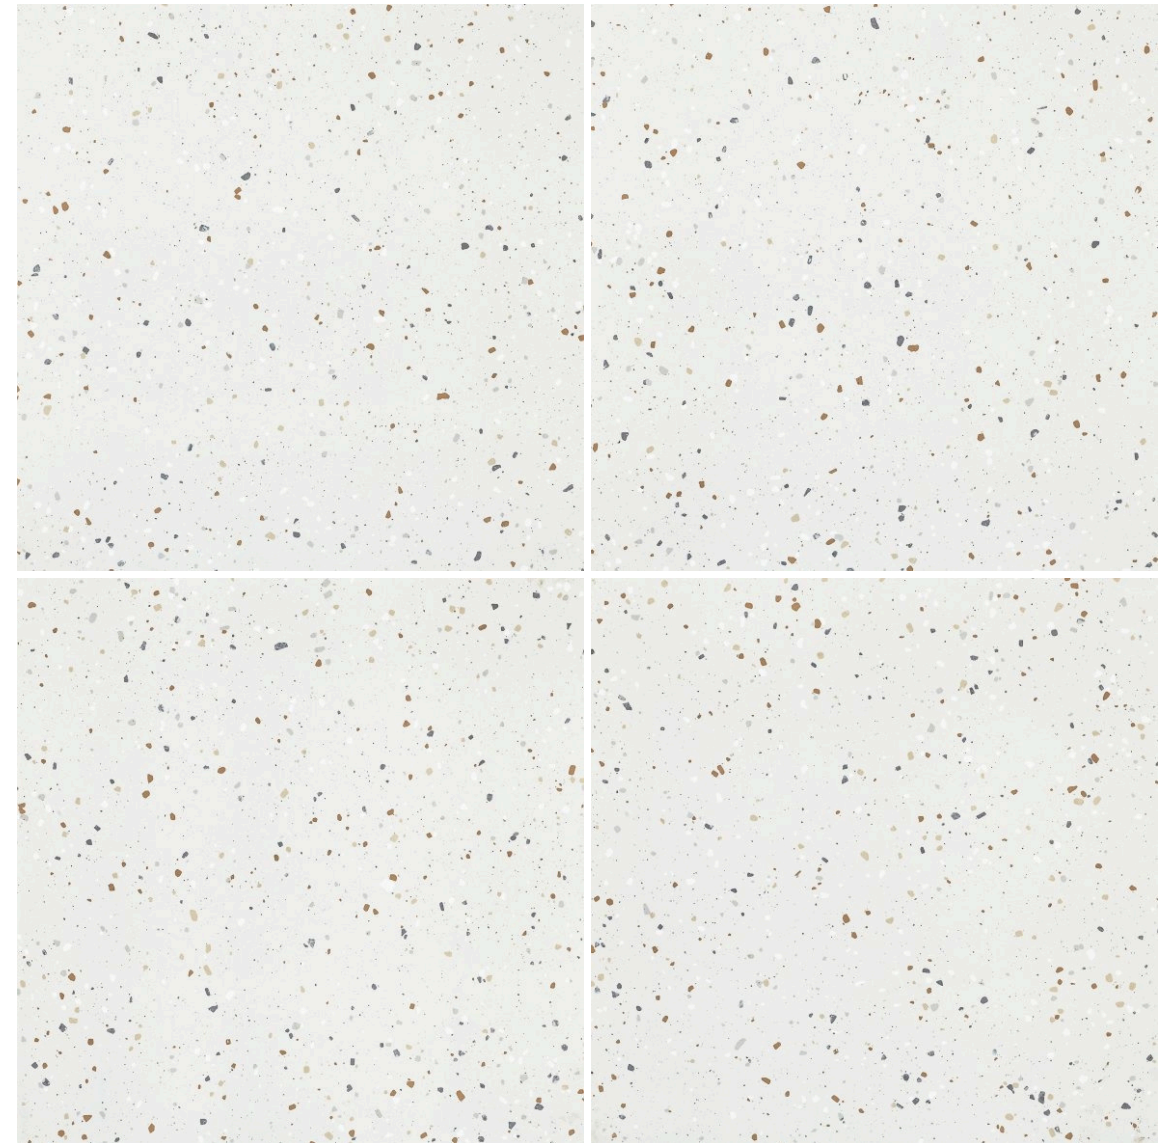


Polished
SP66AB01T
600X600mm 24" X 24"

Random texture



Use The Product:SP 6 6 A B 0 1 T /POLISHED
600X600mm 24" X 24"

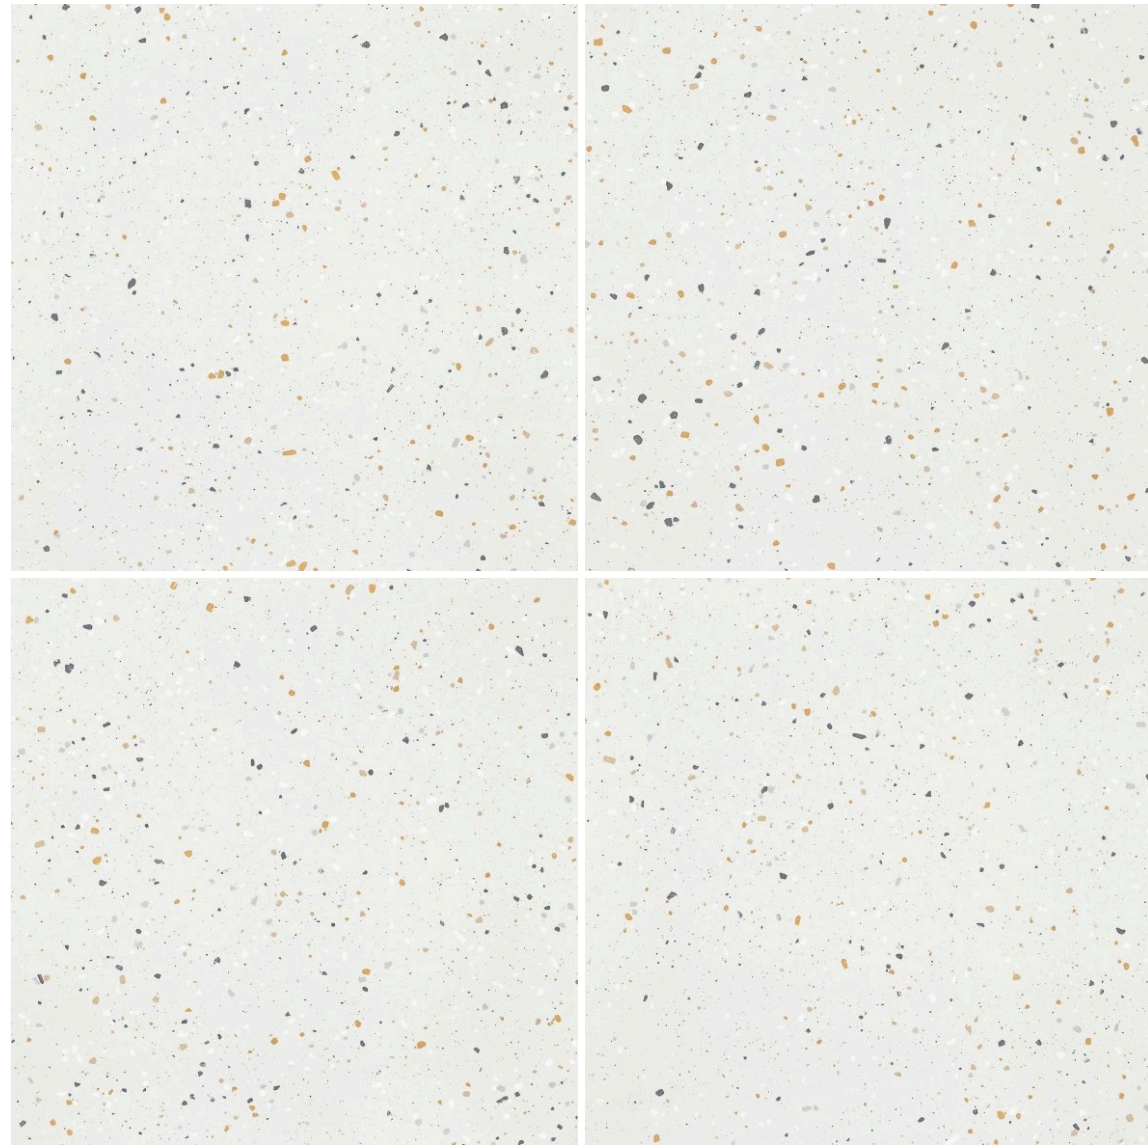

Polished
SP66AB02T
600X600mm 24" X 24"

Random texture




Use The Product:SP 6 6 A B 0 2 T /POLISHED
600X600mm 24" X 24"




Use The Product: S P 6 6 A B 0 3 T / POLISHED
600X600mm 24" X 24"



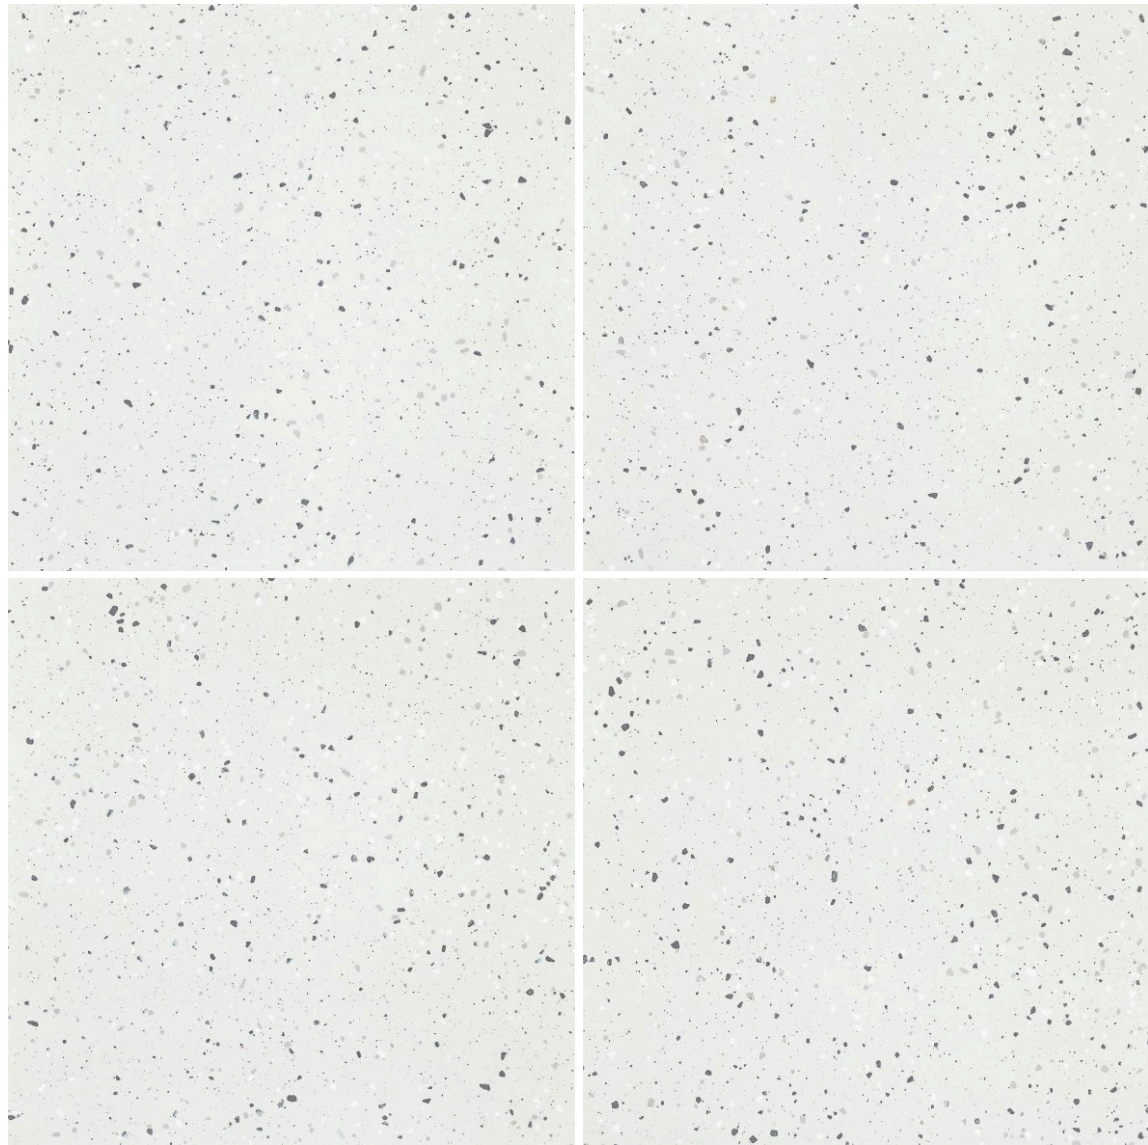

Polished
SP66AB03T
600X600mm 24" X 24"

Random texture
hd P R

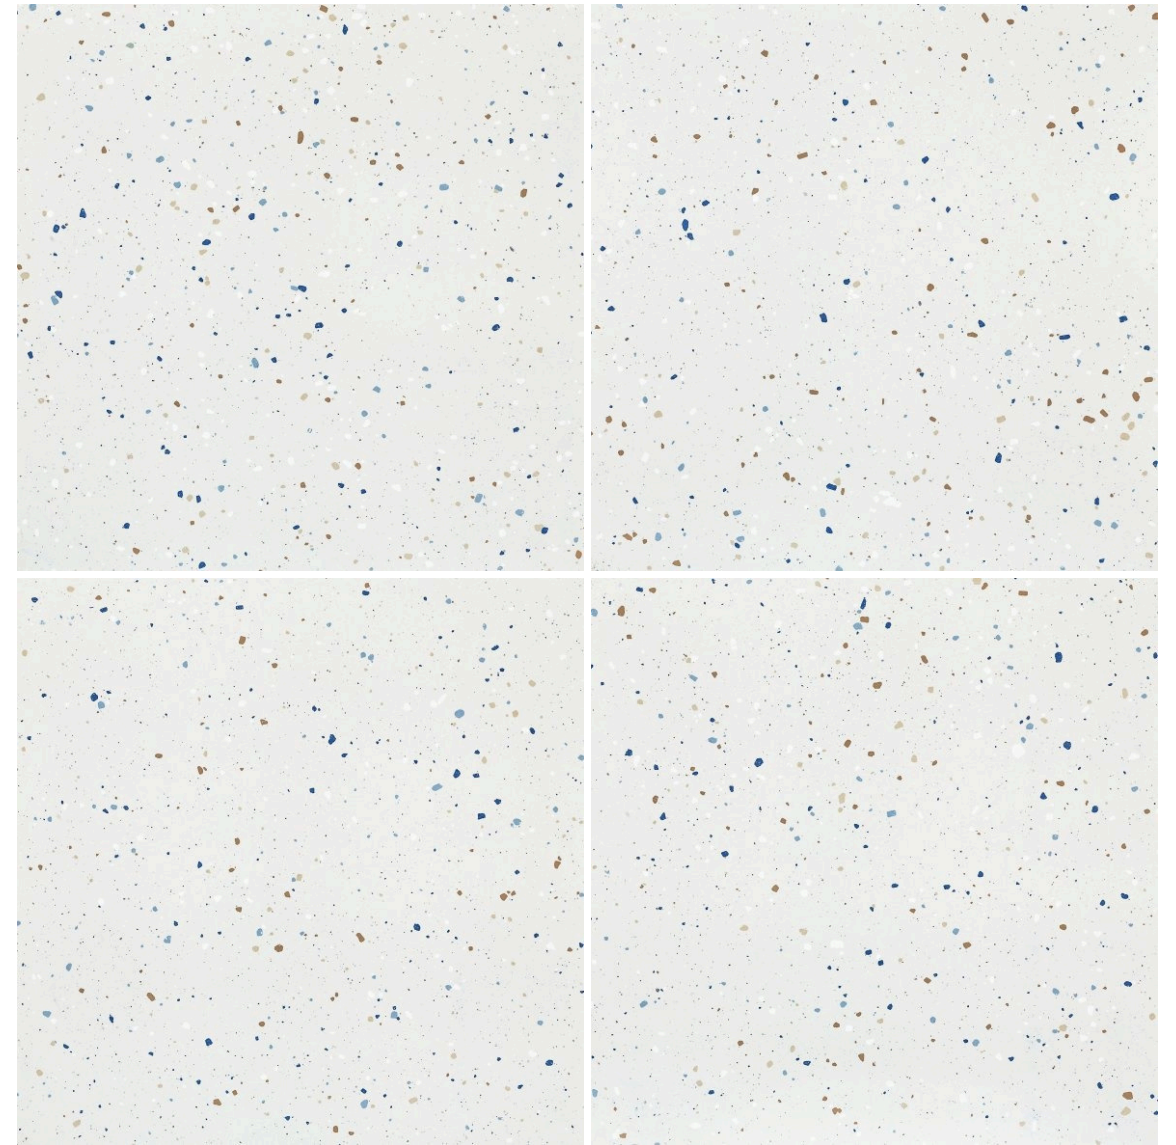

Polished
SP66AB04T
600X600mm 24" X 24"

Random texture
hd P R

Use The Product: S P 6 6 A B 0 4 T / POLISHED





Polished
SP66AB05T
600X600mm 24" X 24"


Random texture



Use The Product:SP 6 6 A B 0 5 T /POLISHED
600X600mm 24" X 24"




Use The Product: SP 66 A B 06 T / POLISHED
600X600mm 24" X 24"

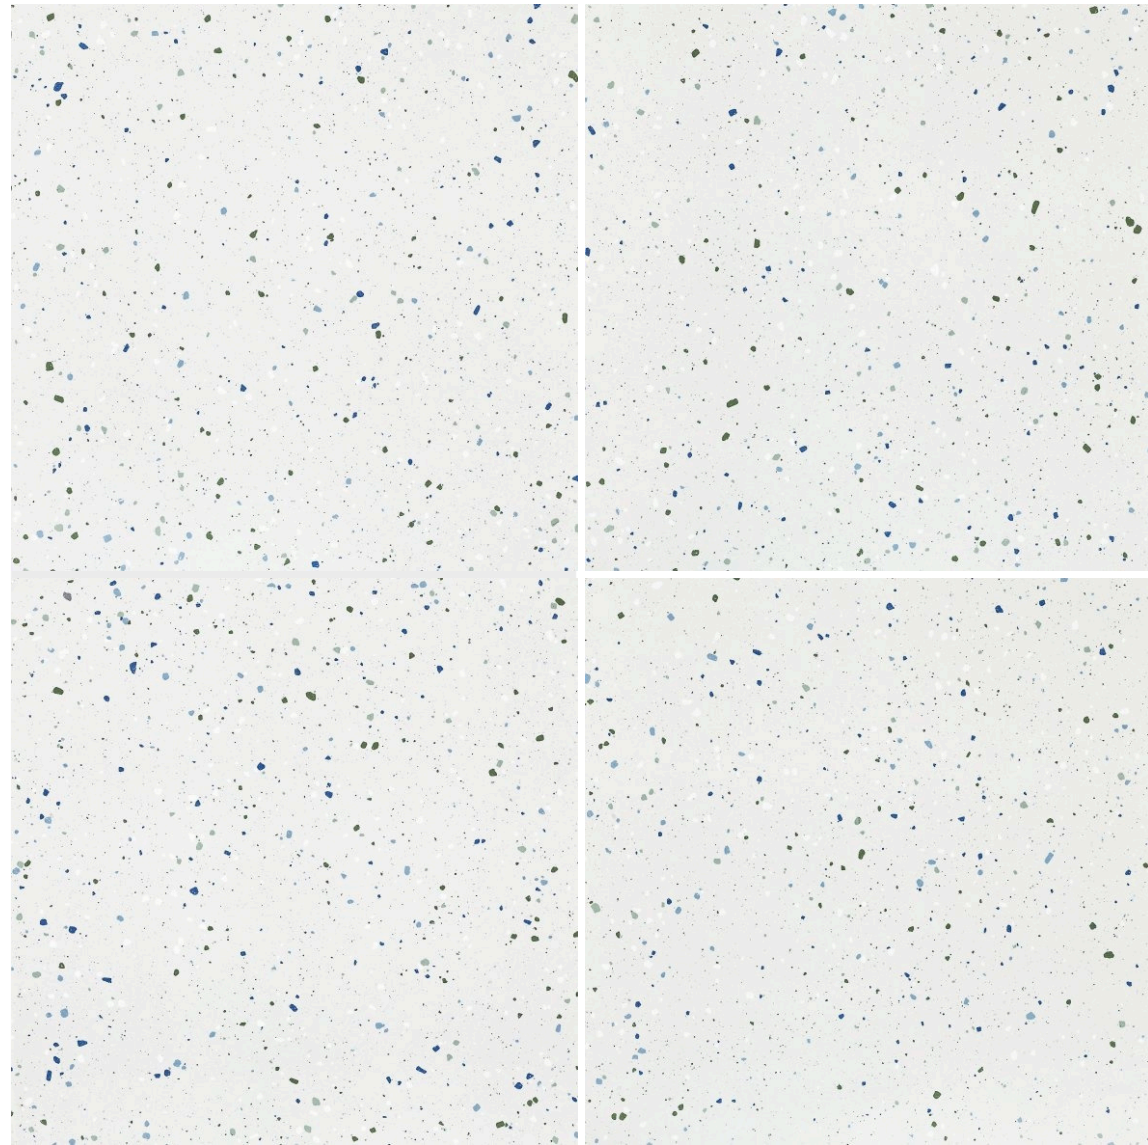

Polished
SP66AB06T
600X600mm 24" X 24"

Random texture
 hd P R

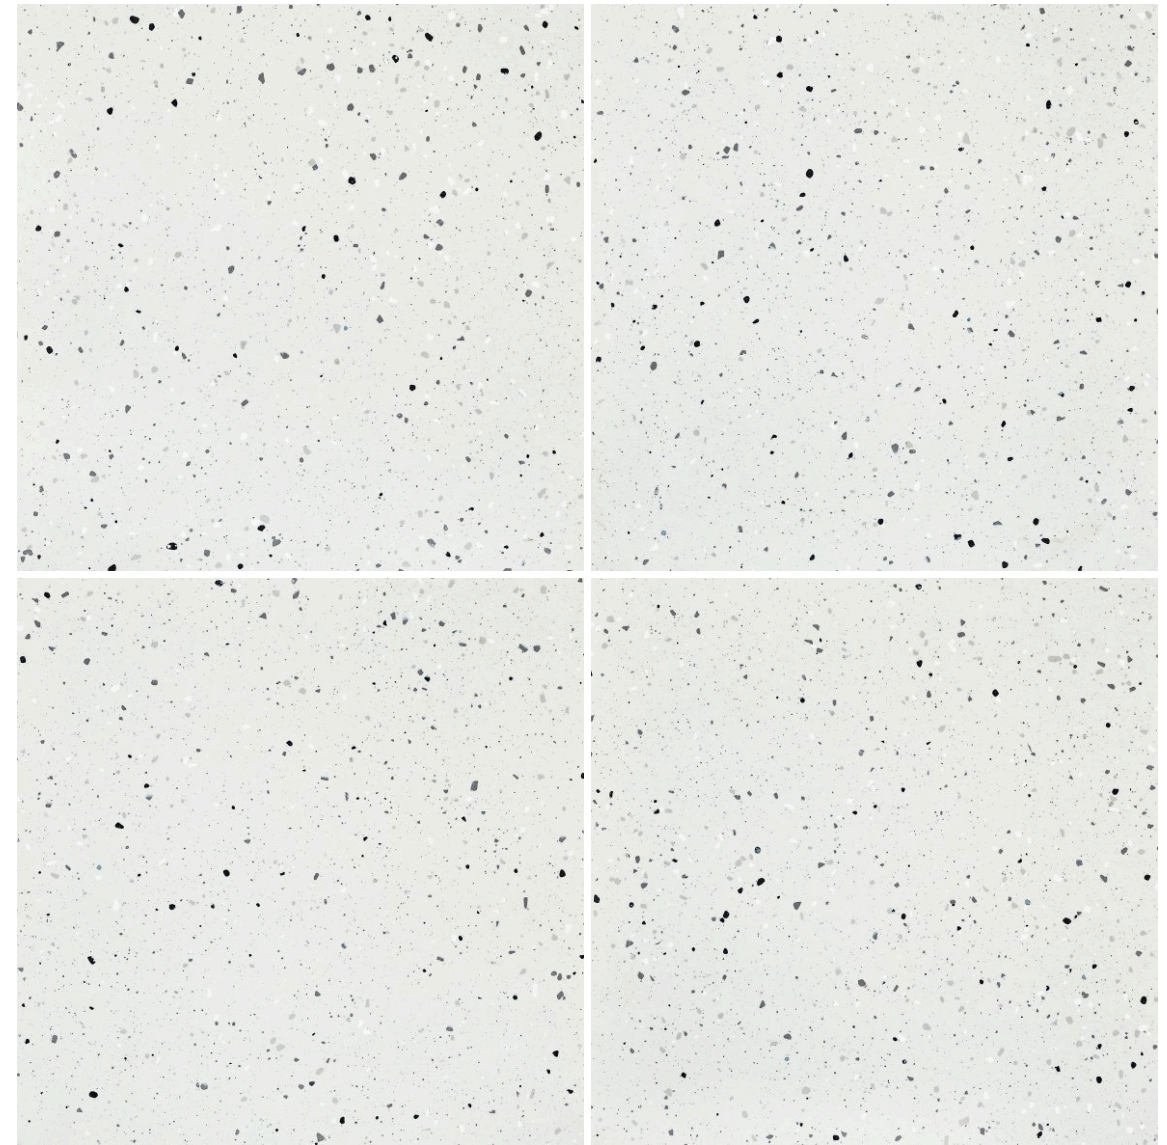


Polished
SP66AB07T
600X600mm 24" X 24"

Random texture
 hd P R




N o v a S p e c k

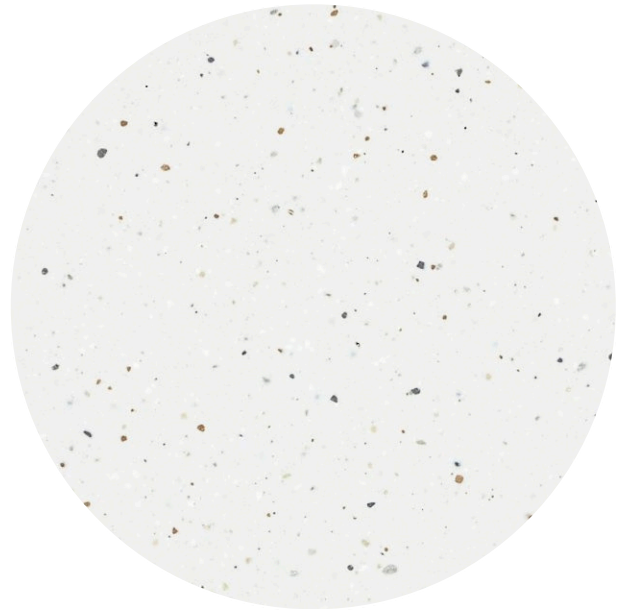



Use The Product:SP 6 6 A C 0 1 T /POLISHED
600X600mm 24" X 24"

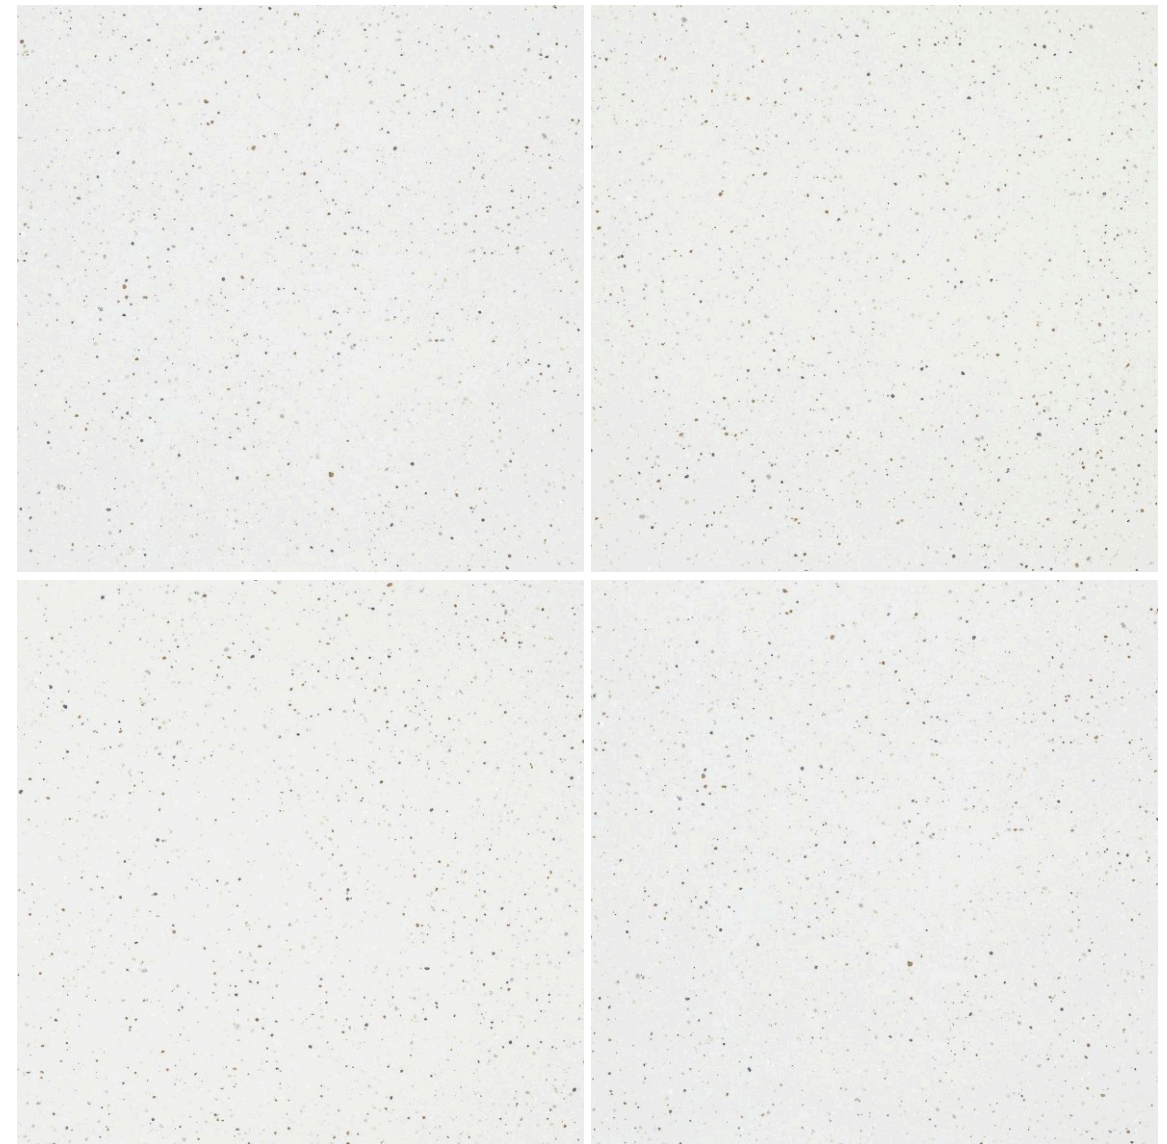


Polished
SP66AC01T
600X600mm 24" X 24"

Random texture




Enlarge texture

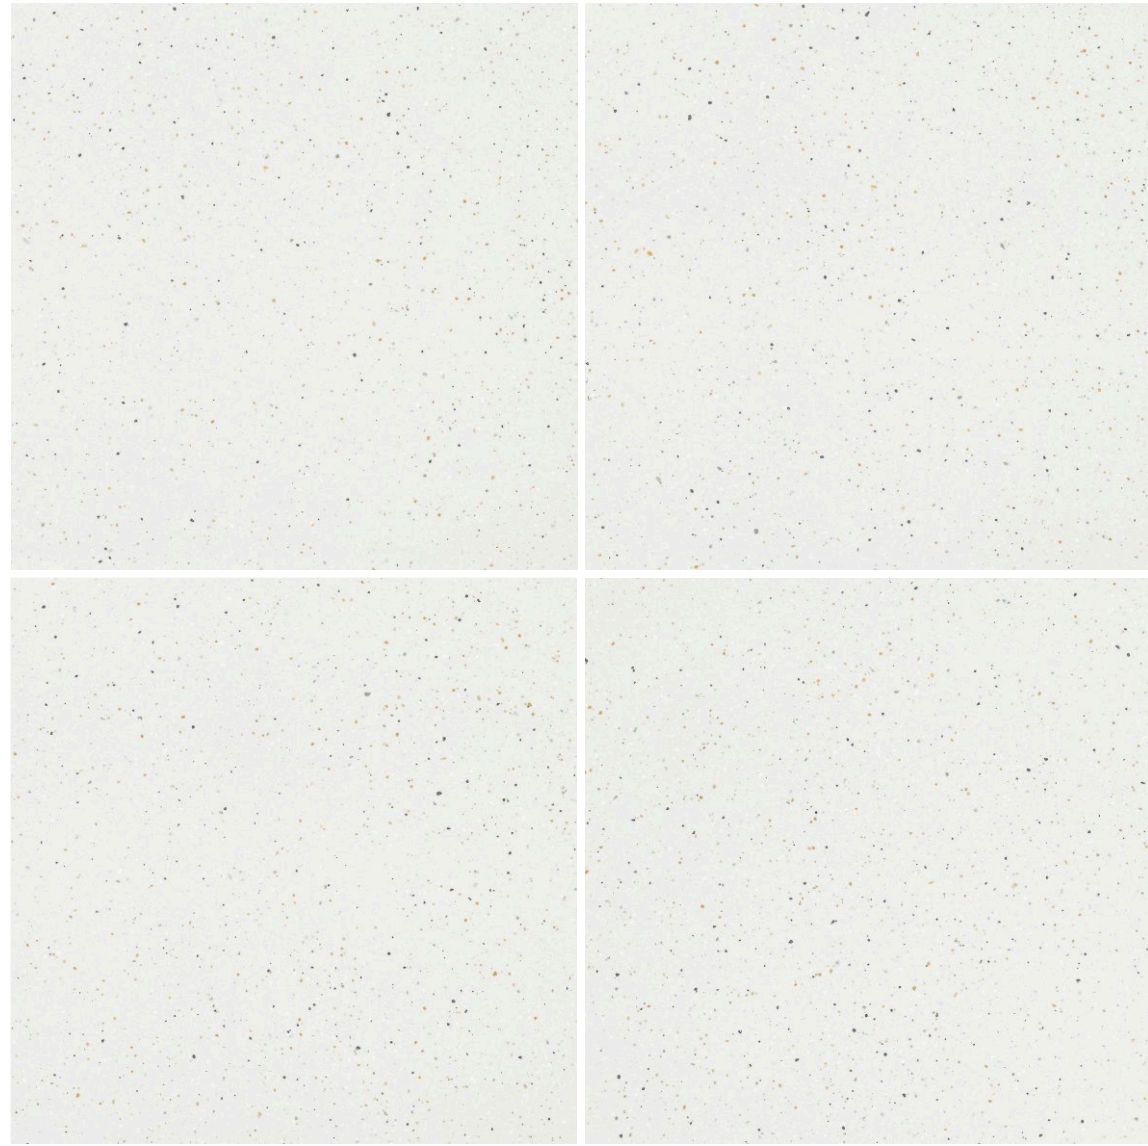

Polished
SP66AC02T
600X600mm 24" X 24"

Random texture

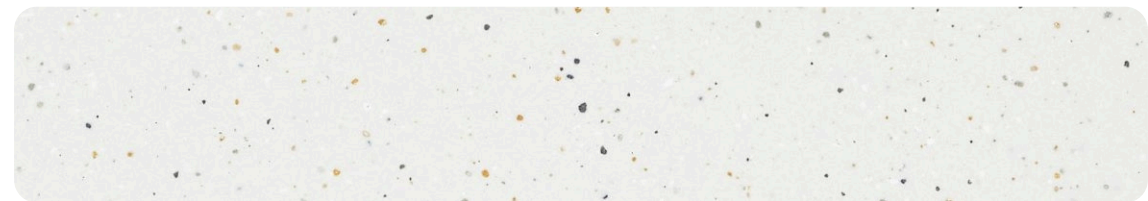

Enlarge texture


Use The Product: SP66AC02T /POLISHED

600X600mm 24" X 24"




Use The Product: S P 6 6 A C 0 3 T /POLISHED
600X600mm 24" X 24"



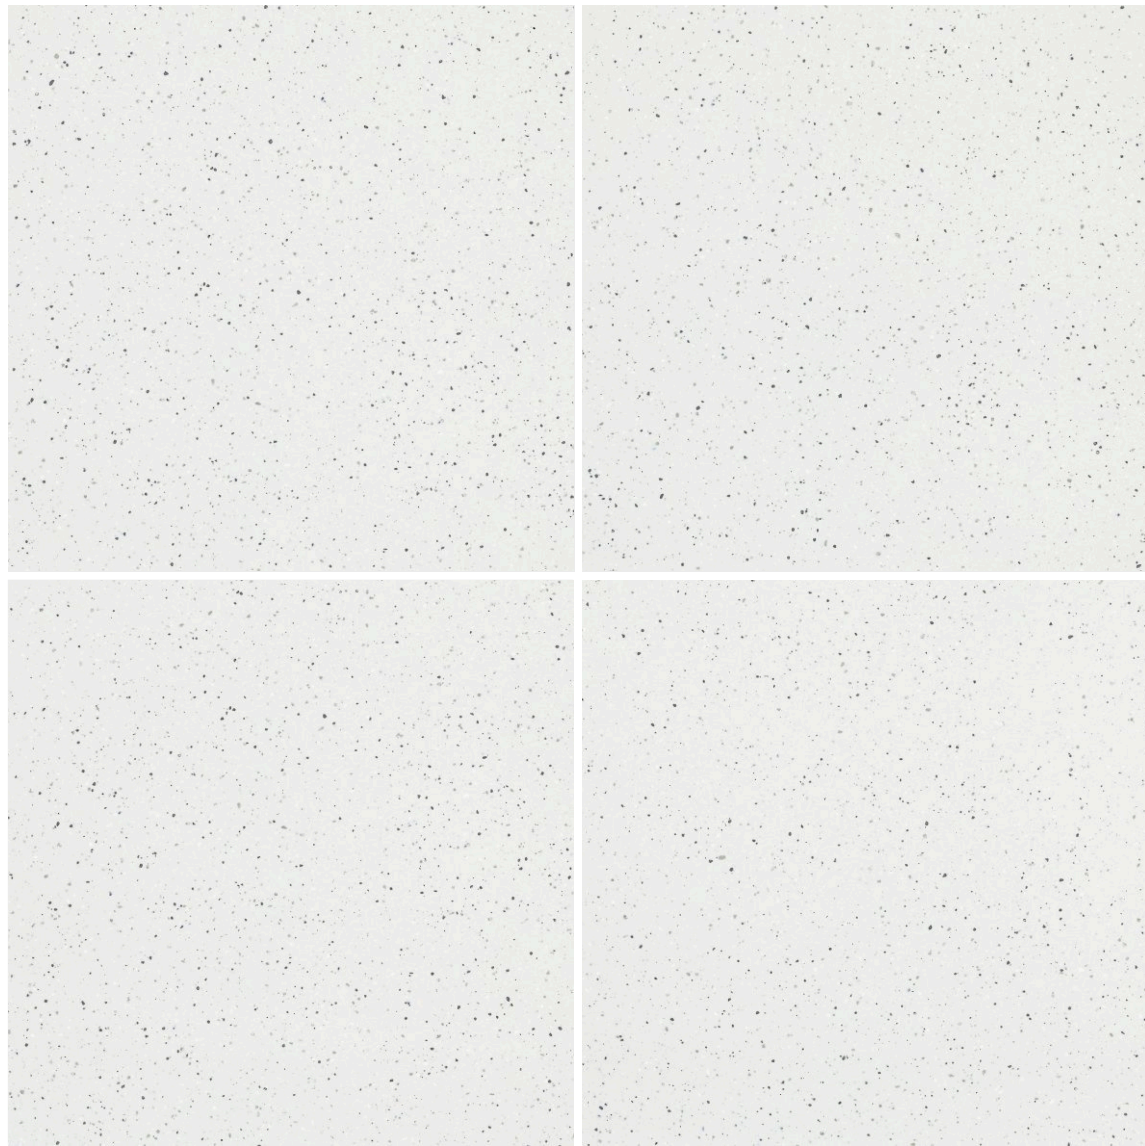

Polished
SP66AC03T
600X600mm 24" X 24"

Random texture
 hd P R

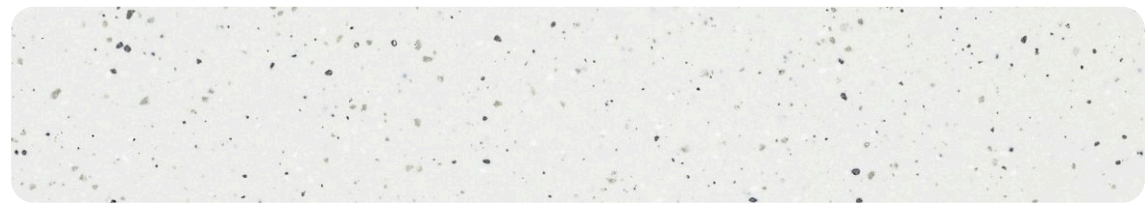


Enlarge texture



Polished
SP66AC04T
600X600mm 24" X 24"

Random texture
 hd P R

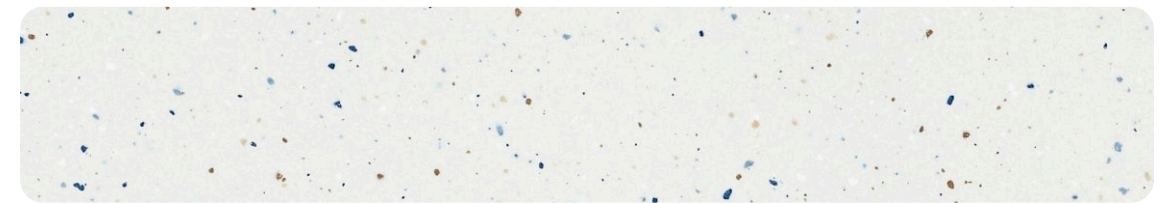

Enlarge texture

Use The Product: S P 6 6 A C C 0 4 T / POLISHED
600X600mm 24" X 24"






Use The Product: SP66AC05T /POLISHED
600X600mm 24" X 24"



Polished
SP66AC05T
600X600mm 24" X 24"

Random texture

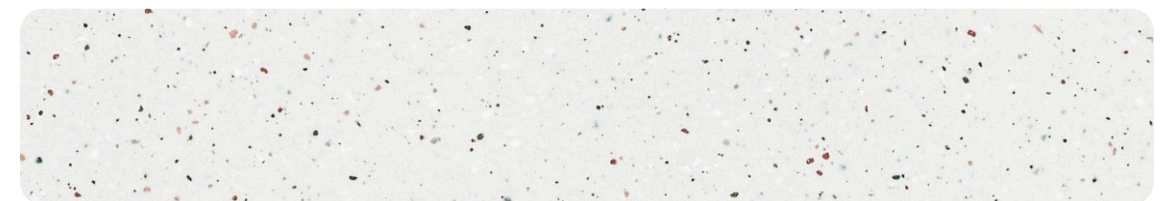


Enlarge texture



Polished
SP66AC06T
600X600mm 24" X 24"

Random texture

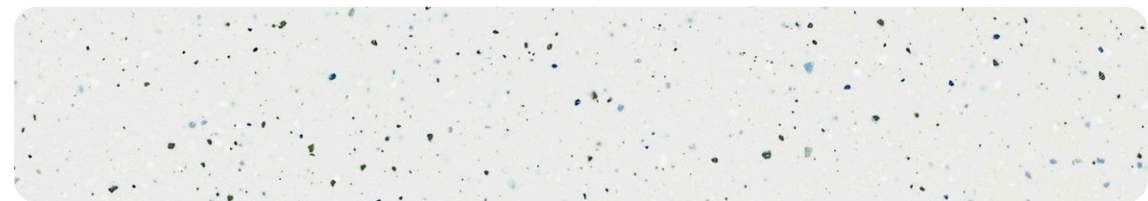


Enlarge texture


Use The Product:SP 6 6 A C 0 6 T /POLISHED
600X600mm 24" X 24"




Installation Method



After opening up the box of tiles, please confirm the tile pattern, tile size and its color type, pave the same ones on the same part, not mix to pave different ones on one part (except for obtaining special decoration effect on purpose).




To create the best decoration effect, we should notice to array the tiles according to its arraying style, pay attention to the direction of pattern tiles, and clean up the walls or floors before paving.




To pre-array the tiles, we should first make two vertical lines on the ground, and check the horizontal level with horizontal rule, check the vertical level with a weight.




Commend to use 325# cement to pave piece tiles, use 425# cement or the mixture of cement and tile strengthening agent to fire cement block tiles, and moist piece tiles before paving it (not including others).




To avoid surrounding because of the difference of ceramics heat swelling factors and concrete heat swelling factors, confirm the lines and keep ash slot according to the tile sizes: 3mm (for external wall tiles), 1.5mm (for interior wall tiles), 3-5mm (for floor tiles), 5-15mm (for imitating stone tiles).




In the process of files paving, apply sticky slurry to fill the tile slots and then slick its surface, especially for the external wall tiles, or apply color fillings to fill them according to customers need.




To pave main wall corners use proper doses of sticky slurry and level it. Keeping it at a thickness of about 1cm, and then put one piece of tile on it, and gently hammer it with a wooden hammer to confirm the cohering and horizontal or vertical level of tile surfaces and edges.




In the process of tiles paving, often strike the tiles with the hammer handle to confirm its stickiness.



In one hour, clean up in time the excessive Cement and other wastes on the paved tiles.



In twelve hours, check if there is surrounding parts under the paved tiles with a hammer, if there is, re-pave it.



In twenty-four hours, you can step and completely wash it with clean water and cleaning agent, and a beautiful tile-decorated wall or floor will before you!



Not use the tiles if you question the tiles qualities or feel unsatisfactory, and immediately contacted with the loaded dealers or our factory.